


Flameproof LED Emergency Light 100 Watt



Depth = 205 mm

	SALIENT FEATURES
Input	230 VAC
Wattage	100 Watts
Moc	LM 6, Aluminum, IP 65
Weight	15 kg approx.
Light	High bright LED
Light colour	High bright cool white LED
Battery backup	60 minutes
Charging time	8 Hours, charger inbuilt in box
LED heat dispersion	Through internal thermal construction
Viewing angle	120°
Colour Temperature	6500K
LED Life span	50,000 Hrs
Hardware	SS
Coating	Powder coated
Function Type	Automatic ON when power supply OFF
Operating Temp.	Upto 50 °C
Cable entry	Max. 2 Nos . - M20 or 1/2 " NPT or 3/4" NPT (we give M20 by default)
Gas group	IIA, IIB, Zone 1 and Zone 2

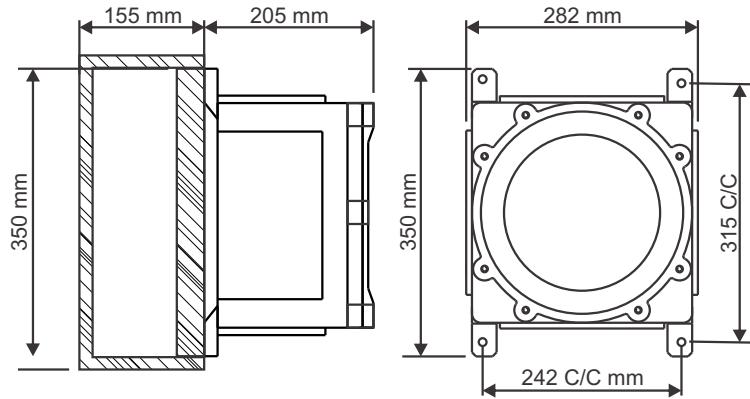

Flameproof Instrumentation

Made in



Flameproof Instrumentation

Plot. No. E/14, Addl. MIDC, Anand Nagar, Ambarnath (E), Dist. Thane, Maharashtra, India — 421 506.,

sales@flameproof.co.in

9321160178



www.flameproof.co.in