# Flameproof Hooter with Flasher (95 dB)






	SALIENT FEATURES
Aux. Supply	230 VAC / 110VAC / 24VDC (select any one option)
Power Consumption	300mA @ 24 VDC & 60mA @ 230 VAC
Audio Range	95 dB
Flasher	LED
Operating Temp.	Up to 55°C
Humidity	90% at 40°C
Enclosure	LM 6, Aluminum
Weather Protection	IP 65
Coating	Powder coated
Dimension	As per drawing
Applications	Hazardous area
Gas group	IIA, IIB & IIC, Zone 1 & Zone 2
Weight	6 Kg Max
Terminals	Up to 2.5 Sqmm
Cable Entry	M20 OR 3/4" NPT OR 1/2" NPT (select any one)
Mounting	Wall mounting / slab mounting type

### Flameproof Instrumentation






## Dimensional Details

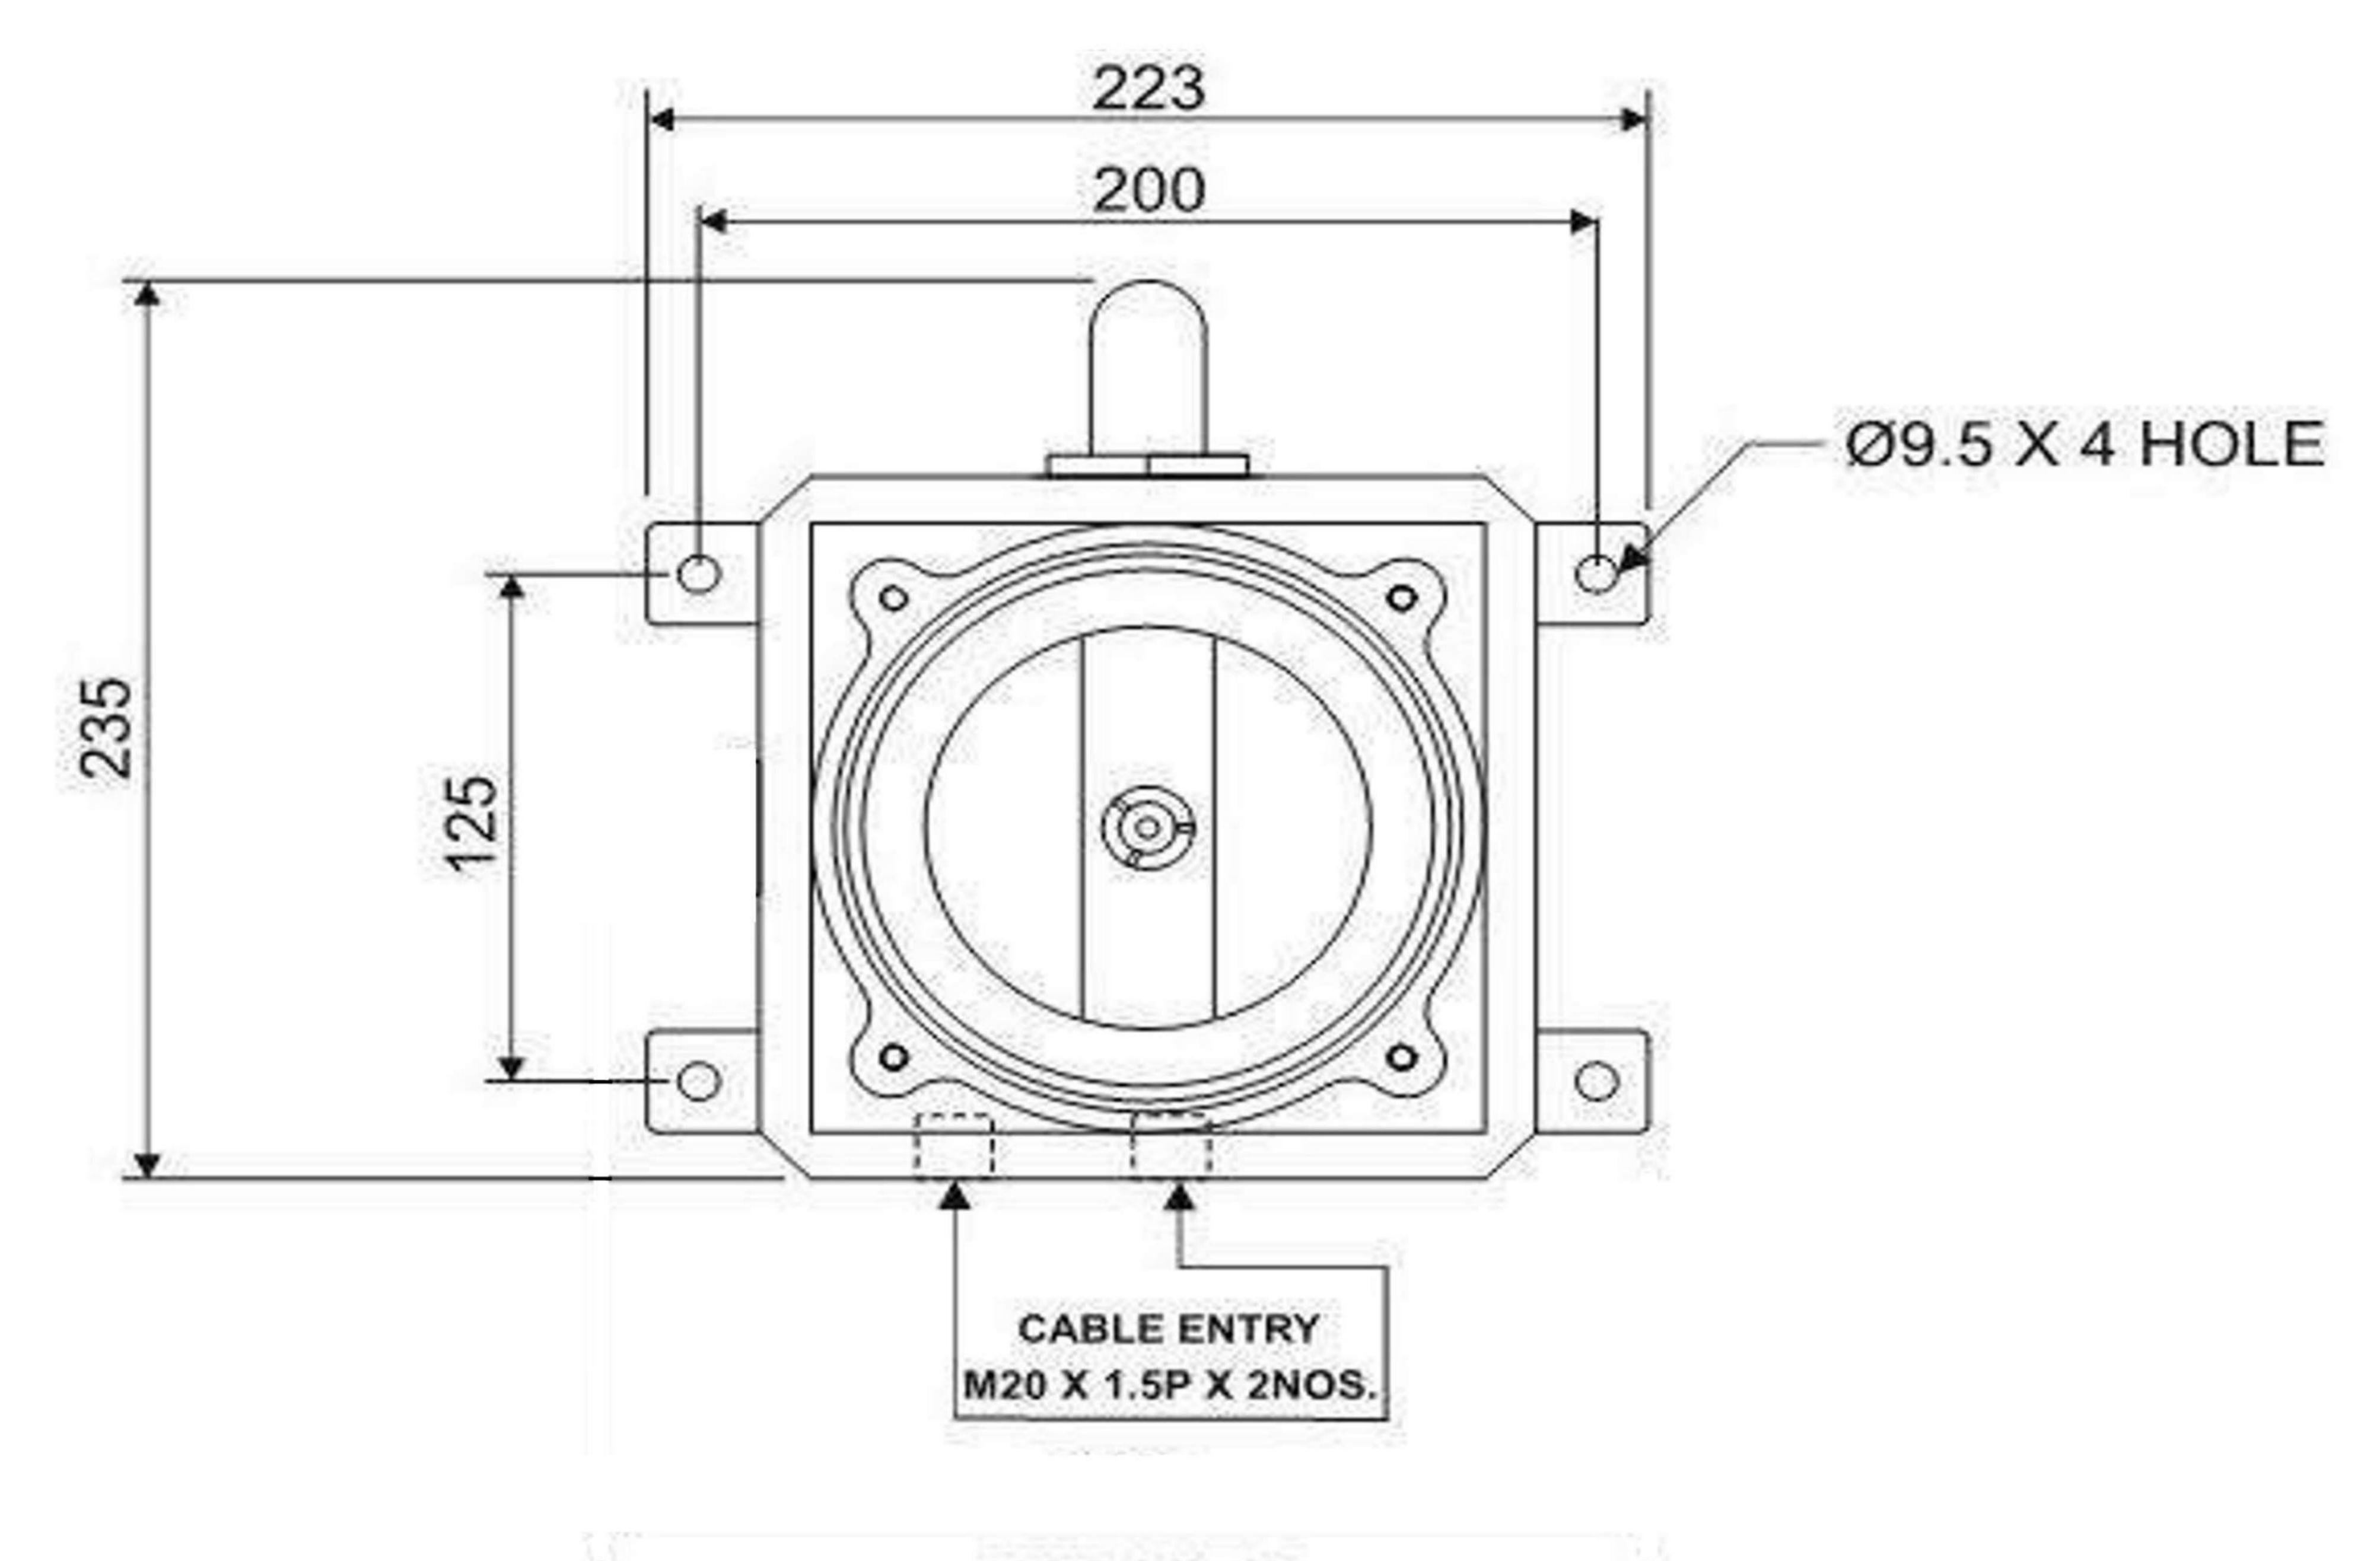

#### TOP VIEW

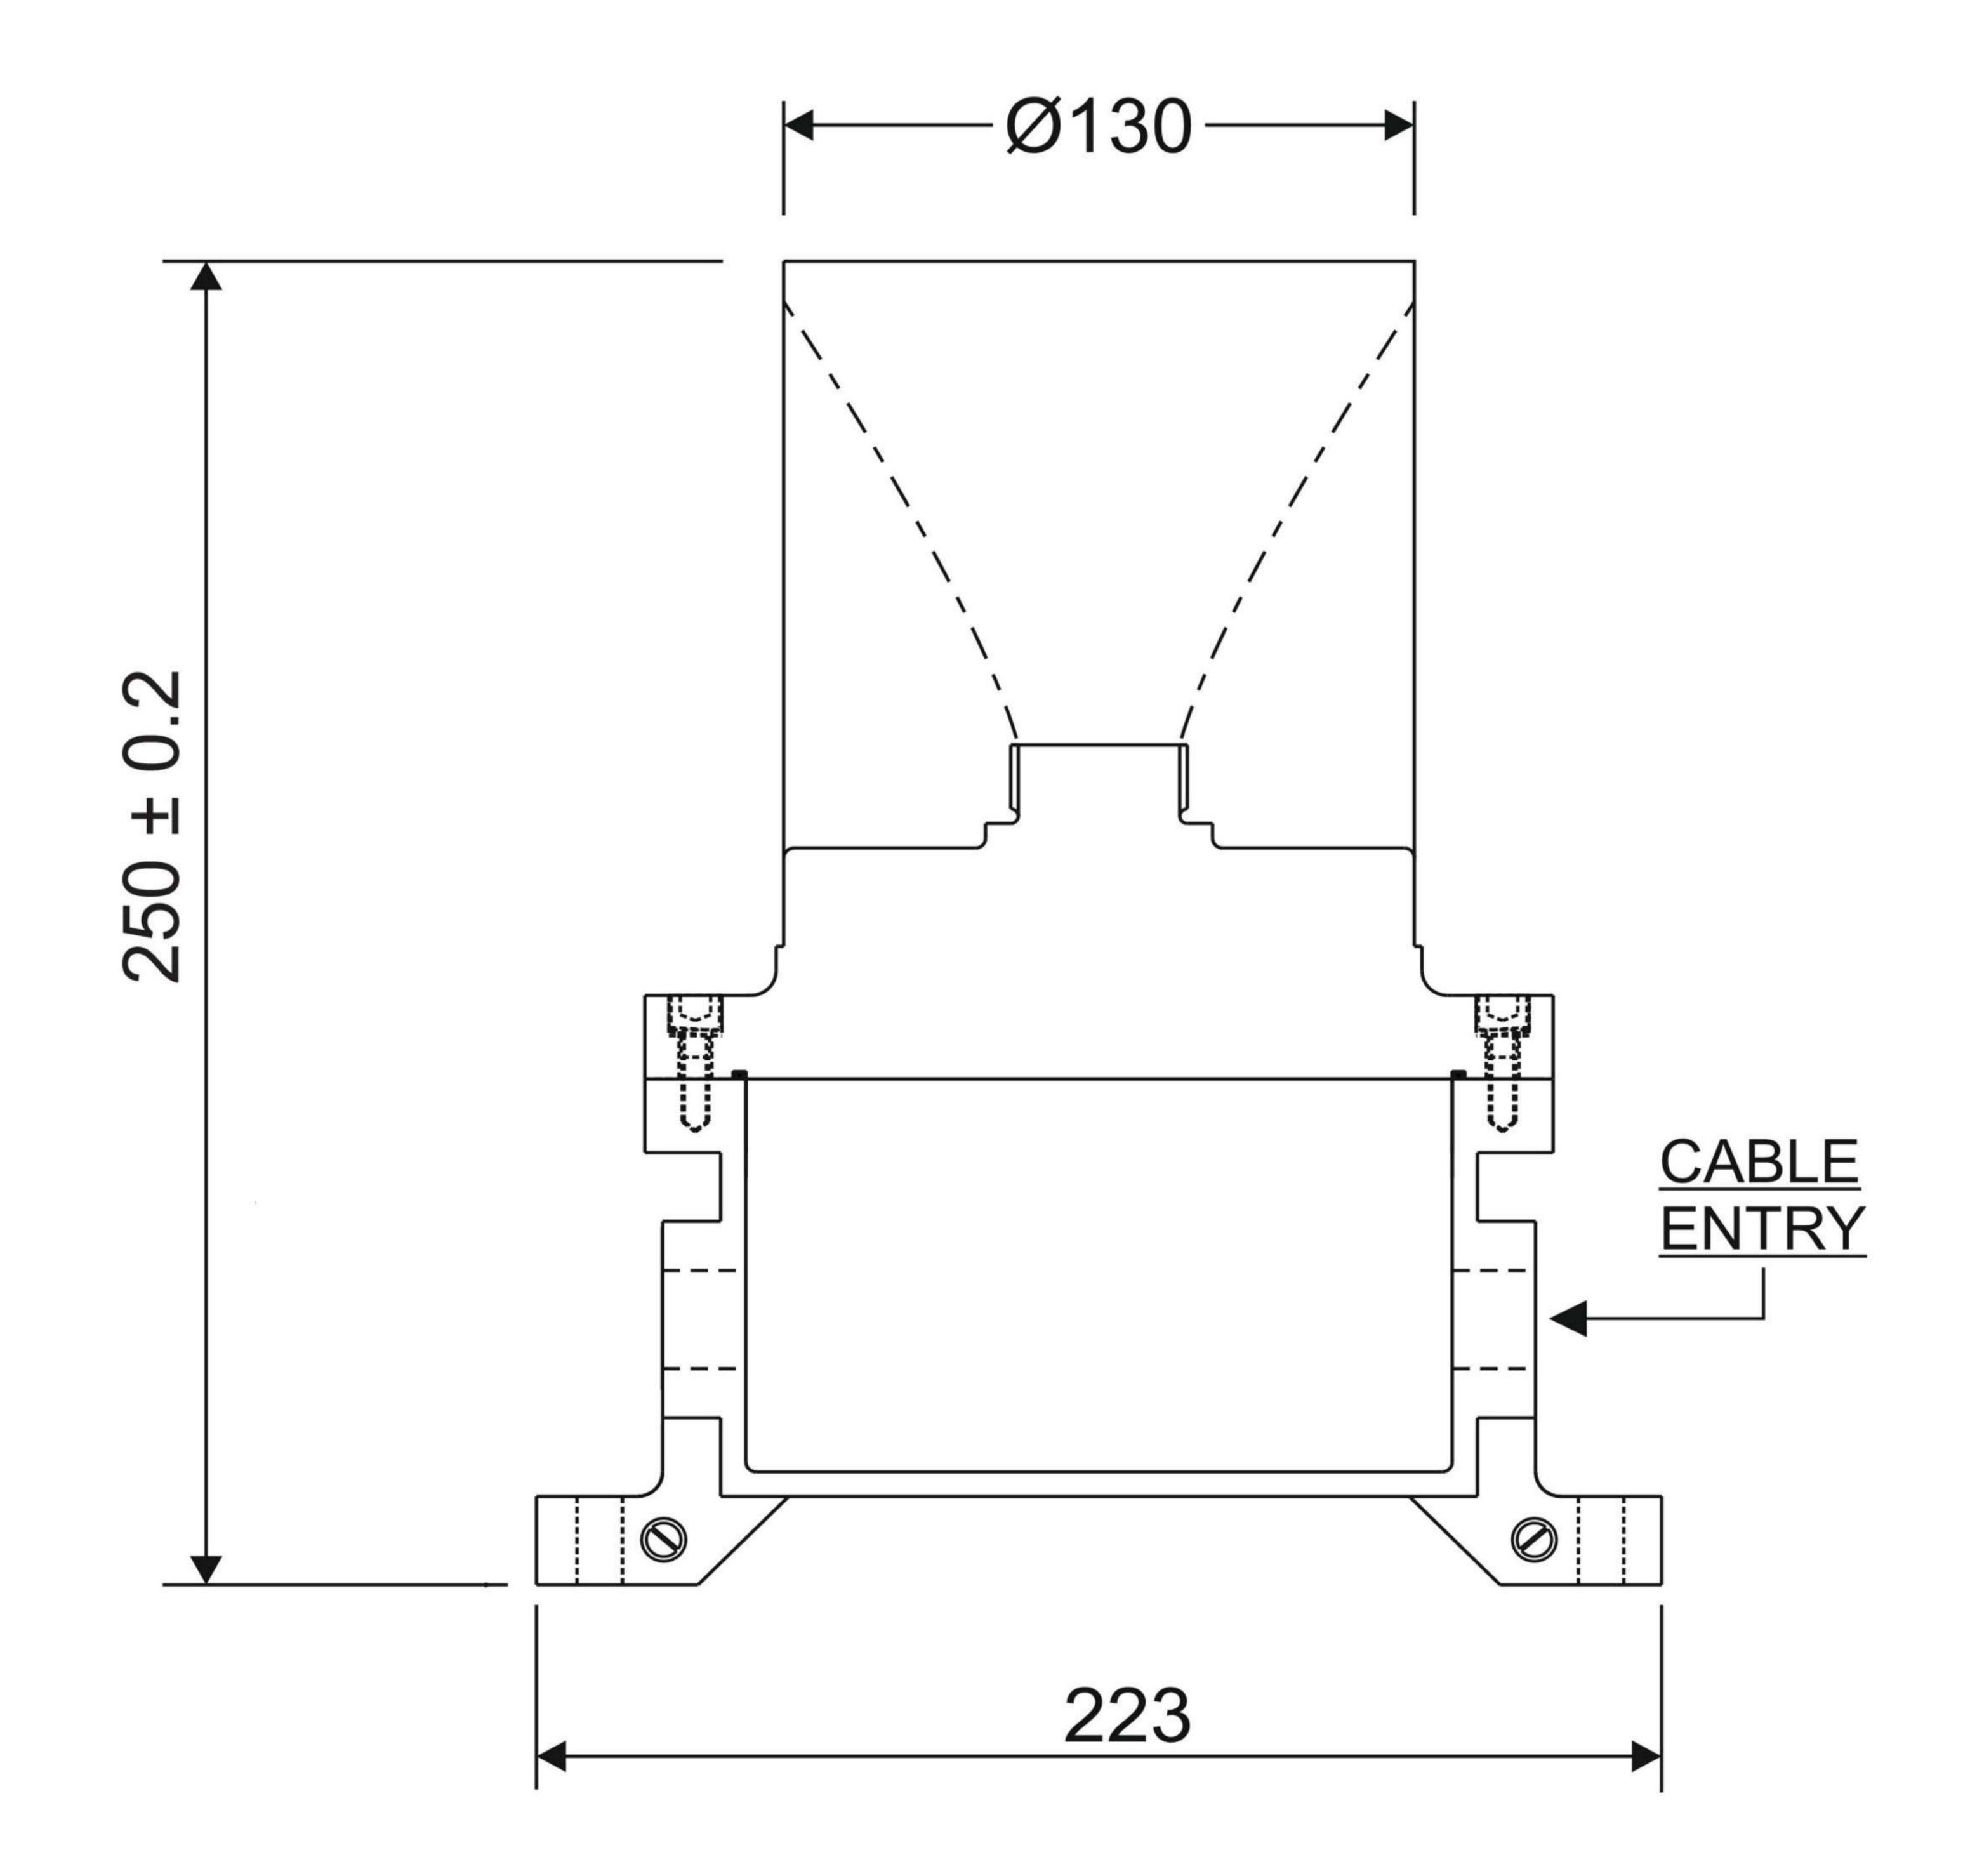

FRONT VIEW

All dimensions are in mm



Flameproof Instrumentation

Made in



### Flameproof Instrumentation



Plot. No. E/14, Addl. MIDC, Anand Nagar, Ambernath (E), Dist. Thane, Maharashtra, India — 421 506.,

